


INSTALLER NOTE: STANDARD OFFSET BLOCK SLATS W/ ENDS FIELD CUT TO FIT INSTALLER NOTE: — STANDARD OFFSET BLOCK SLATS w/ ENDS FIELD CUT TO FIT DURA-CRETE DUMPSTER ENCLOSURE 20'-X10') SCALE = 1:32



MINIMUM FOUNDATION SPECS AS FOLLOWED:

ENCLOSURE TYPE DURA-CRETE WALL PLAN PLEASE SEE BELOW FOR ADDITIONAL CONCRETE PAD SPECIFICATION REQUIREMENTS

GOVERNING BUILDING CODES:

MICHIGAN BUILDING CODE BASED ON IBC, LATEST EDITION- OCCUPANCY CATEGORY II

OTHER APPLICABLE CODES:

ASCE / SE7-05 ACI 318-08 ANSI / AISC 360-10

DUMPSTER ENCLOSURE (20'-X10') CONTAINS:

(1) BASE PLATE TEMPLATE GA. MATERIAL/SIM)
(4) CONNER WALL POSTS
(4) CONNER WALL POSTS
(5) CONNER WALL POSTS
(5) LIST LOS FOR THE SECOND STATE SHOULD SHOULD STATE SHOULD SAFE PROVIDED ARE PROVIDED AND THE STEMES FOR GATE LEAF WEDGE ANCHORS (HDD) ARE PROVIDED STEMES FOR GATE LEAF MEDGE ANCHORS (HDD) ARE PROVIDED

S-SERIES OFFSET BLOCK WALL SPECIFICATIONS
CORNER POST OFF = 113 fbs;
(4) CF15 REIO = 4518b;
LINE POST WIDE 1-PVH = 1060bs
(1) PF18 REIO = 1008b

115" DURA-CRETE SLAT WT# = 160lbs QTY OF DURA-CRETE SLATS REQ'D = 9 PER WALL 36 TOTAL WEIGHT = 5760 POUNDS TOTAL

CONCRETE PAD AND PAD REQUIREMENTS SHOWN ARE INSTALLED W/ VERIFICATION BY OTHERS

ALL EXPOSED STEEL FRAMING IS GALVANIZED. ALL HARDWARE TO HAVE RESISTANCE TO OUTDOOR ELEMENTS

ENCLOSURE OFFSET BLOCK WALL CONCRETE PAD SPECIFICATION REQUIREMENTS: ENCLOURES PAD GRADE ALLOWANCE = 1" TO EVERY 10"-0" (0.48° OR ½5TO 12")
ENCLOSURES < 8"-0" TALL REQUIRE A MIN. 6" SLAB FOUNDATION
ENCLOSURES = 10" (UP TO 10") TALL REQUIRE A MIN. 6" THICK SLAB FOUNDATIO
ENCLOSURES : 10"-0" TALL WILL REQUIRE POST FOOTINGS

△ 01/14/2025 FOR FIELD USE WA LLS



PLEASE NOTE:



PLASE NOTE:


THESE DRAWINGS REPRESENT DURA-CRETE WALLS
INTERPRETATION OF THE INTENT OF THE CONTRACT
DOCUMENTS. EVERY EFFORT HAS BEEN HADE TO
ENSURE THAT THEY ARE ACCURATE AND
COMPLETE. APPROVAL BY THE AUTHORIZED
PARTIES SHALL CONSTITUTE ACCEPTANCE, AND
ANY POST-APPROVAL CHANGES WILL BE CONSIDERED.







PROJECT LOCATION

DC01

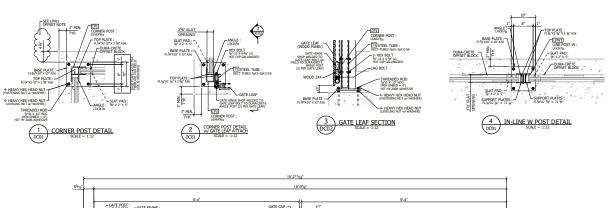

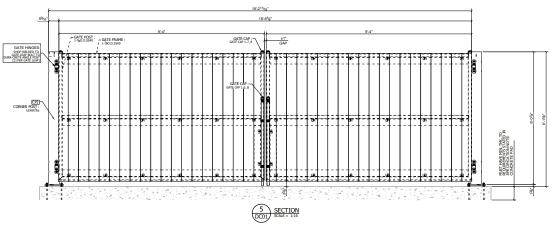



ENCLOSURE OFFSET BLOCK WALL
CONCRETE PAD SPECIFICATION REQUIREMENTS:
ENCLOSES PAGE ALLOWAGE = 170 EVERY 10-76 (8-49 OR 14/10 127)
ENCLOSIES - 67 TAL INCLUDIES A NIN. 67 SAB FOUNDATION
ENCLOSIES - 67 TAL INCLUDIES A NIN. 67 SAB FOUNDATION
ENCLOSIES - 67 TAL INCLUDIES A NIN. 67 SAB FOUNDATION
ENCLOSIES - 67 TAL INCLUDIES DOTT COMINS.

